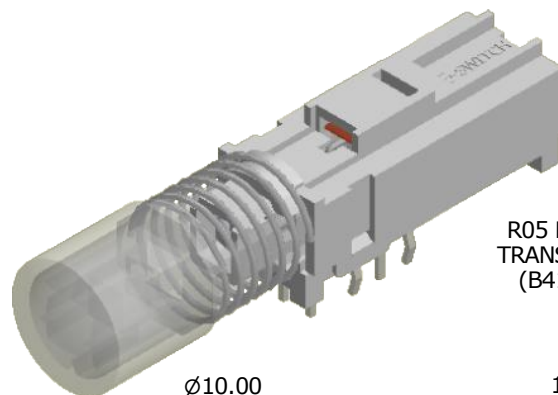
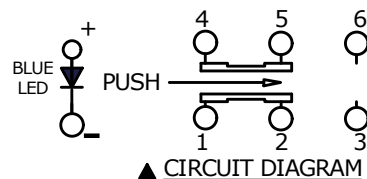
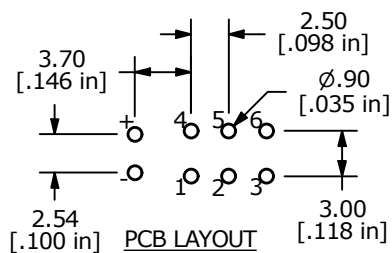
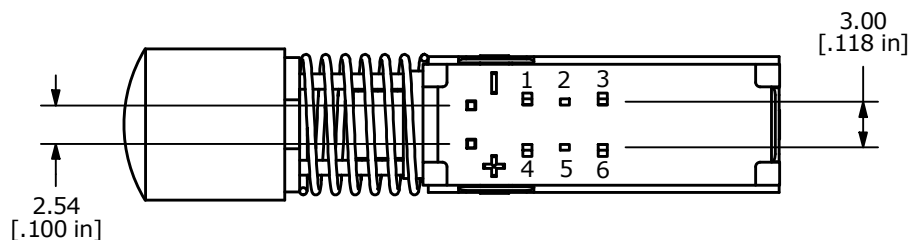
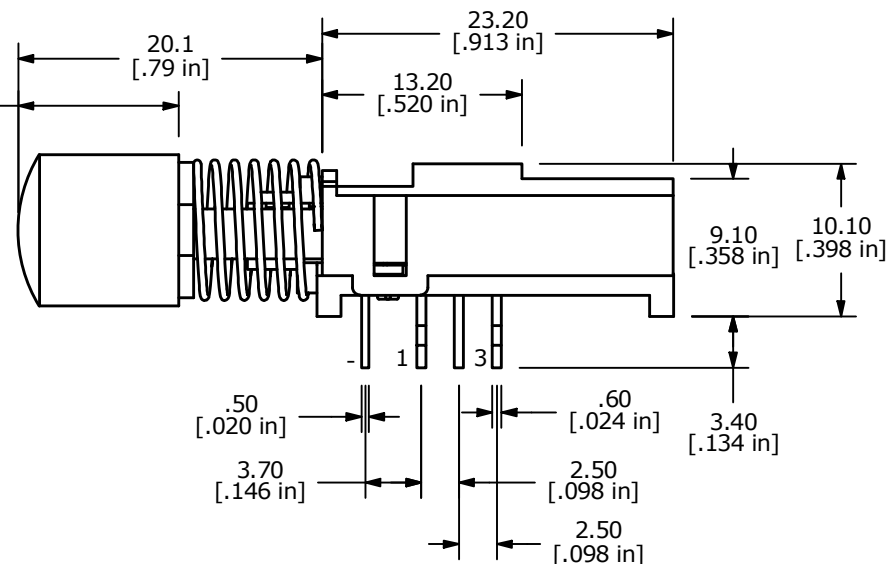
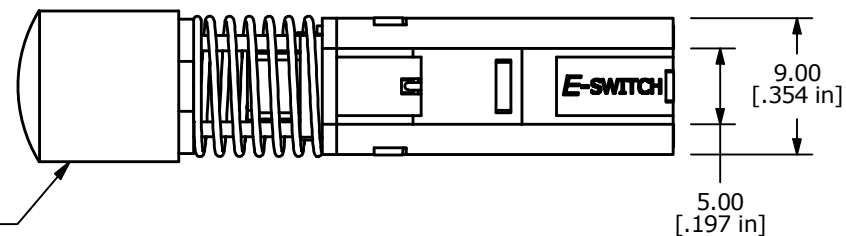
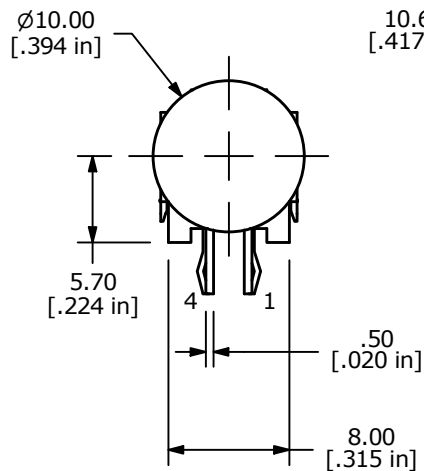


R05 BUTTON  
TRANSPARENT  
(B410000)

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x=± 0.4mm  
x.xx=± 0.25mm
3. RATING: DC 30V, 0.3A
4. OPERATING FORCE: 200± 100gf
5. TRAVEL: 3.3mm FULL TRAVEL  
2.5mm TO LOCK
6. LIFE CYCLES: 10,000 CYCLES
7. OPERATING TEMPERATURE: -40°C TO 85°C
8. CONTACT RESISTANCE: 20mΩ MAX.
9. INSULATION RESISTANCE: 100MΩ MIN@ 500VDC.
- ▲ 10. LED COLOR: BLUE
11. ▲ DENOTES CRITICAL PARAMETER.

| LED SPECS                 | UNITS | BLUE     |
|---------------------------|-------|----------|
| FORWARD CURRENT           | mA    | 20       |
| FORWARD VOLTAGE @20mA     | V     | 2.7-3.50 |
| LUMINOUS INTENSITY @ 20mA | MCD   | 1500 TYP |

| REV | ECO NO     | DESCRIPTION  | DATE     | BY |
|-----|------------|--------------|----------|----|
| B   | ECO-101787 | PRINT UPDATE | 04/06/23 | JS |
|     |            |              |          |    |
|     |            |              |          |    |

|                                                                                       |                   |           |                |                        |
|---------------------------------------------------------------------------------------|-------------------|-----------|----------------|------------------------|
|  |                   |           |                | OBJECT ID<br>000027419 |
| TITLE WBL2UEEBQR05CLR                                                                 |                   |           |                |                        |
| SCALE<br>2:1                                                                          | DATE<br>1/10/2011 | DR<br>BGL | DWG<br>XB0928P | REV<br>B               |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED