


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

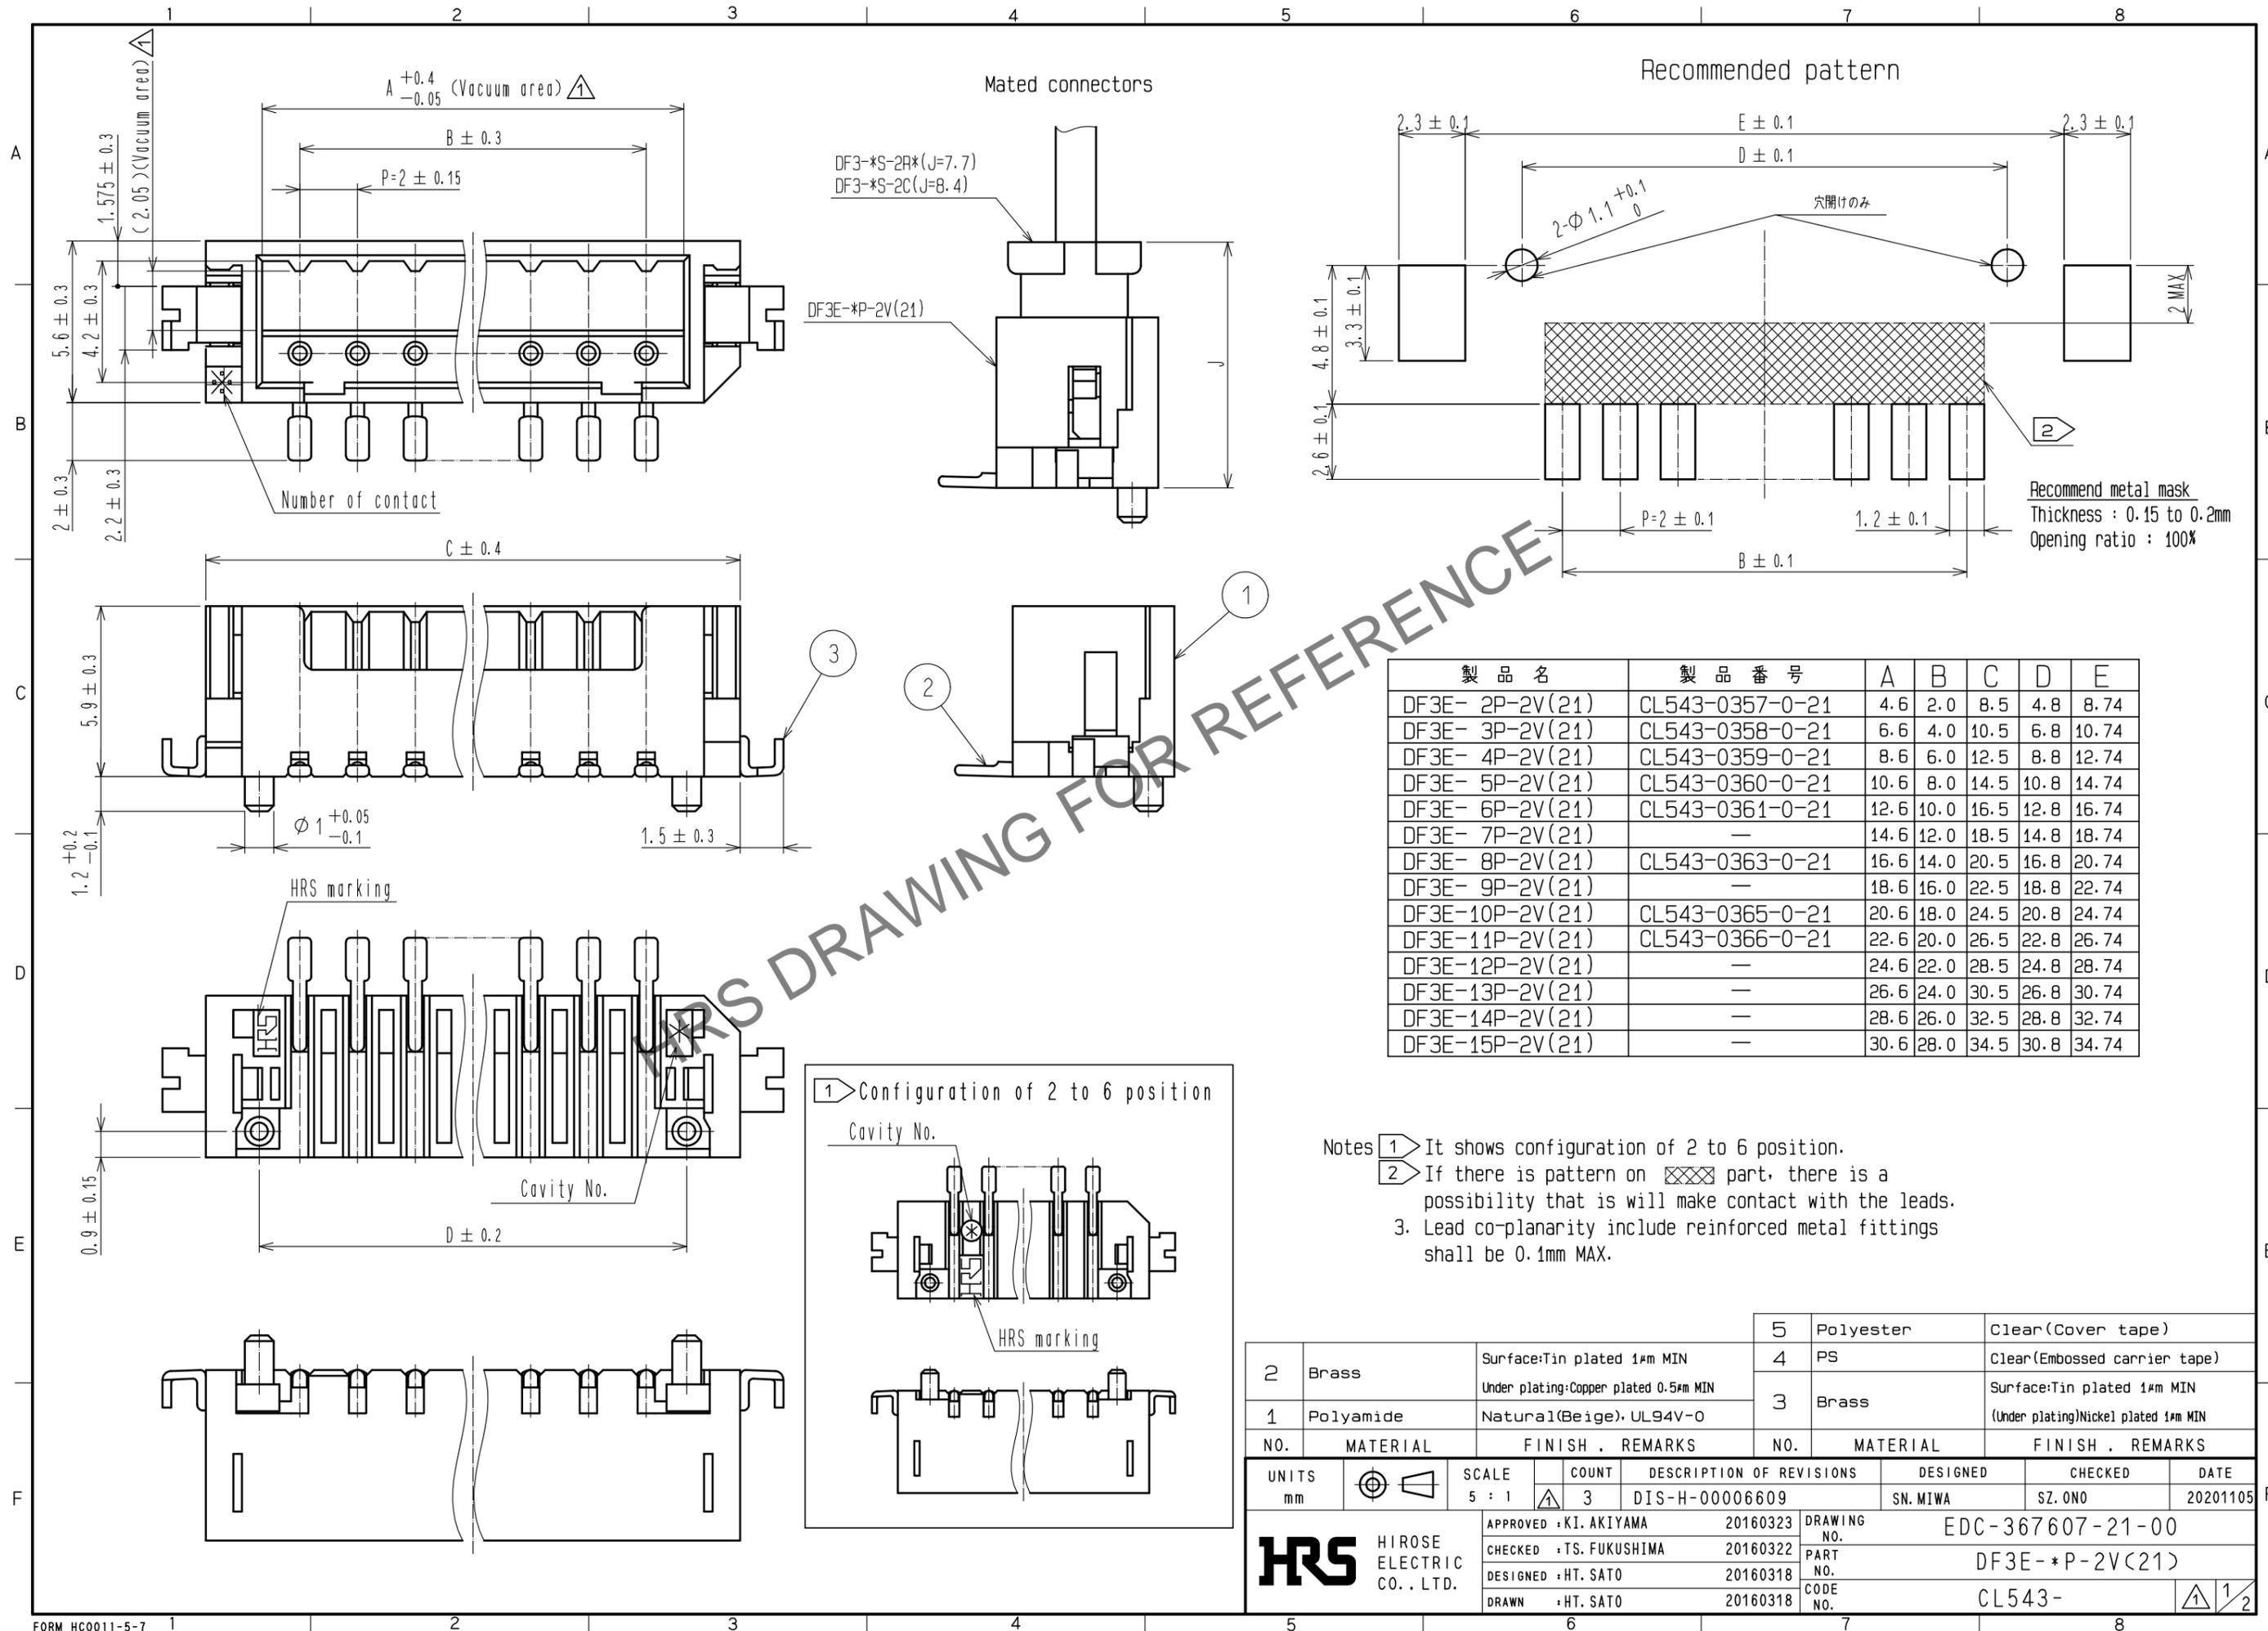

| 製品名 | 製品番号 | A | B | C | D | E |
|-----------------|-----------------|------|------|------|------|-------|
| DF3E- 2P-2V(21) | CL543-0357-0-21 | 4.6 | 2.0 | 8.5 | 4.8 | 8.74 |
| DF3E- 3P-2V(21) | CL543-0358-0-21 | 6.6 | 4.0 | 10.5 | 6.8 | 10.74 |
| DF3E- 4P-2V(21) | CL543-0359-0-21 | 8.6 | 6.0 | 12.5 | 8.8 | 12.74 |
| DF3E- 5P-2V(21) | CL543-0360-0-21 | 10.6 | 8.0 | 14.5 | 10.8 | 14.74 |
| DF3E- 6P-2V(21) | CL543-0361-0-21 | 12.6 | 10.0 | 16.5 | 12.8 | 16.74 |
| DF3E- 7P-2V(21) | — | 14.6 | 12.0 | 18.5 | 14.8 | 18.74 |
| DF3E- 8P-2V(21) | CL543-0363-0-21 | 16.6 | 14.0 | 20.5 | 16.8 | 20.74 |
| DF3E- 9P-2V(21) | — | 18.6 | 16.0 | 22.5 | 18.8 | 22.74 |
| DF3E-10P-2V(21) | CL543-0365-0-21 | 20.6 | 18.0 | 24.5 | 20.8 | 24.74 |
| DF3E-11P-2V(21) | CL543-0366-0-21 | 22.6 | 20.0 | 26.5 | 22.8 | 26.74 |
| DF3E-12P-2V(21) | — | 24.6 | 22.0 | 28.5 | 24.8 | 28.74 |
| DF3E-13P-2V(21) | — | 26.6 | 24.0 | 30.5 | 26.8 | 30.74 |
| DF3E-14P-2V(21) | — | 28.6 | 26.0 | 32.5 | 28.8 | 32.74 |
| DF3E-15P-2V(21) | — | 30.6 | 28.0 | 34.5 | 30.8 | 34.74 |


Notes

- It shows configuration of 2 to 6 position.
- If there is pattern on part, there is a possibility that it will make contact with the leads.
- Lead co-planarity include reinforced metal fittings shall be 0.1mm MAX.

| | | | | | |
|-----|-----------|---|-----|-----------|--|
| 2 | Brass | Surface: Tin plated 1μm MIN Under plating: Copper plated 0.5μm MIN | 5 | Polyester | Clear (Cover tape) |
| 1 | Polyamide | Natural (Beige), UL94V-0 | 4 | PS | Clear (Embossed carrier tape) |
| | | | 3 | Brass | Surface: Tin plated 1μm MIN (Under plating) Nickel plated 1μm MIN |
| NO. | MATERIAL | FINISH . REMARKS | NO. | MATERIAL | FINISH . REMARKS |

| | | | | | | | |
|-------------------------|--|----------|-------|--------------------------|----------|------------------|----------|
| UNITS | | SCALE | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
| mm | | 5 : 1 | 3 | DIS-H-00006609 | SN. MIWA | SZ. ONO | 20201105 |
| APPROVED : KI. AKIYAMA | | 20160323 | | DRAWING NO. | | EDC-367607-21-00 | |
| CHECKED : TS. FUKUSHIMA | | 20160322 | | PART NO. | | DF3E-*P-2V(21) | |
| DESIGNED : HT. SATO | | 20160318 | | CODE NO. | | CL543- | |
| DRAWN : HT. SATO | | 20160318 | | | | | |

Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

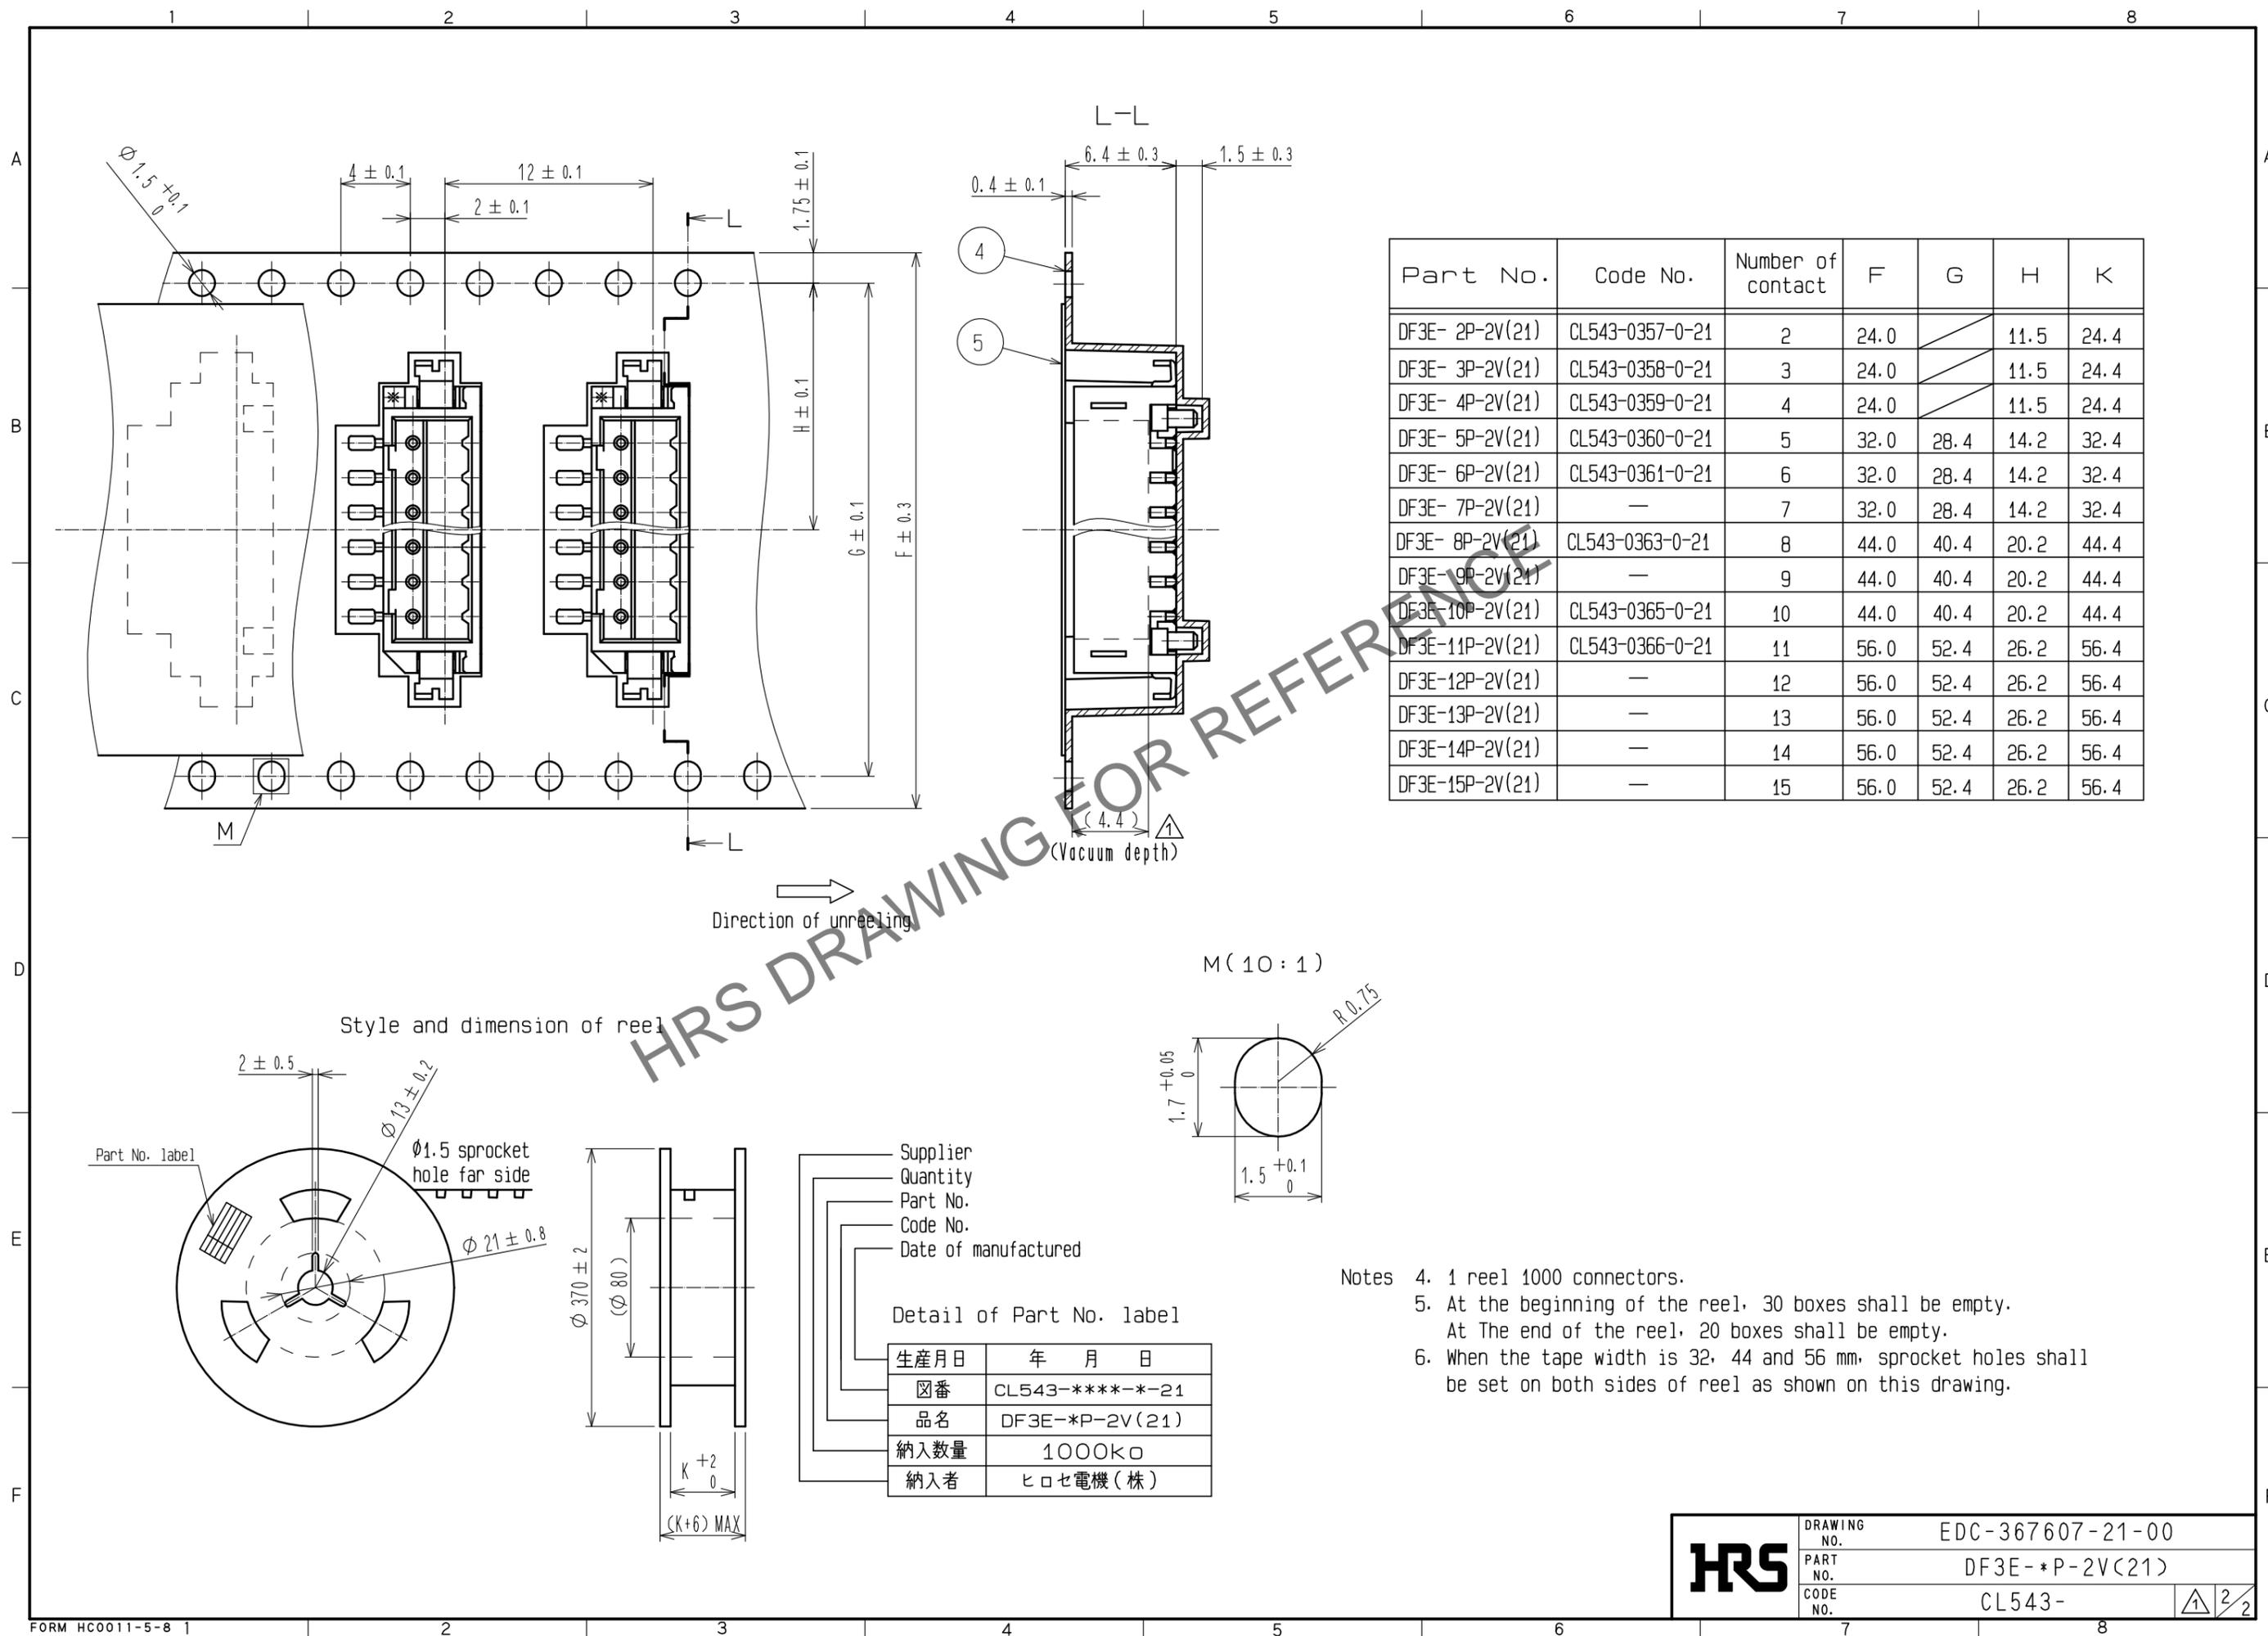

HRS DRAWING FOR REFERENCE

Supplier
 Quantity
 Part No.
 Code No.
 Date of manufactured

Detail of Part No. label

| | |
|------|-----------------|
| 生産月日 | 年 月 日 |
| 図番 | CL543-****-*-21 |
| 品名 | DF3E-*P-2V(21) |
| 納入数量 | 1000K \square |
| 納入者 | ヒロセ電機(株) |

| | | |
|------------|-------------|------------------|
| HRS | DRAWING NO. | EDC-367607-21-00 |
| | PART NO. | DF3E-*P-2V(21) |
| | CODE NO. | CL543- |