




Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2			3			4	
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				


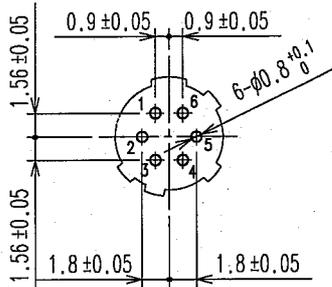


PCB LAYOUT

(INDICATES THE SIDE OF THE SURFACE TO WHICH DIP POSTS ARE INSERTED.)

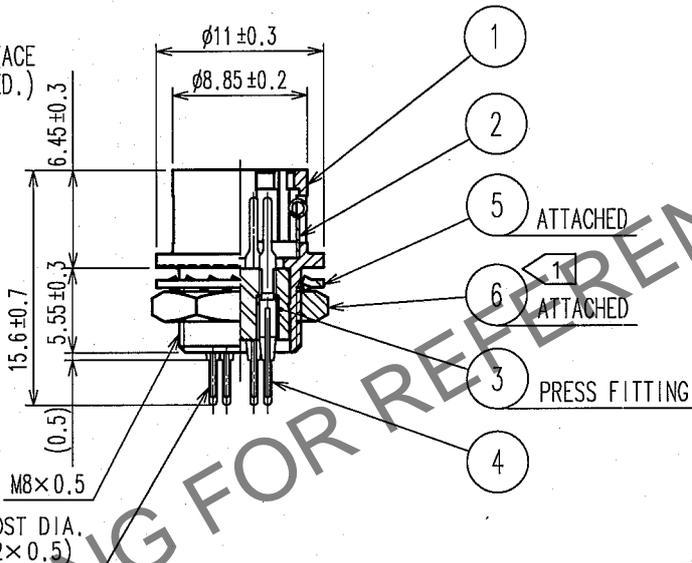

A DETAIL OF MOUNTING GUIDE

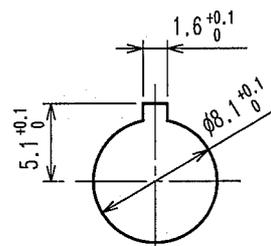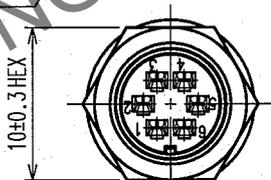

PANEL CUTOUT
t 0.7~2

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑥ : 1.5N · m .
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF. NO. ⑥ FROM LOOSENING.

3	PBT	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	SILVER PLATING 2 μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	CL?	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H.Kishi '05.08.31	H.Kishi '05.08.31	E. Kumii 05.09.02	M. Sato 05.09.02	

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC4-042753-73 HRS HIROSE ELECTRIC CO., LTD.	PART NO. HR10G-7R-6PB(73) CODE NO. CL110-1806-4-73	1/1
-----------------------------------	--	---	-----

TO
R

