
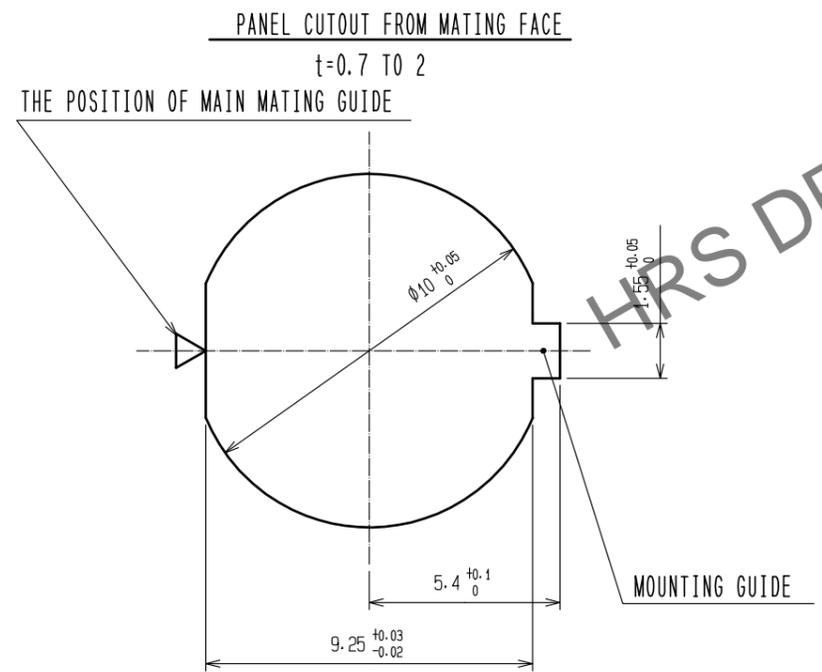
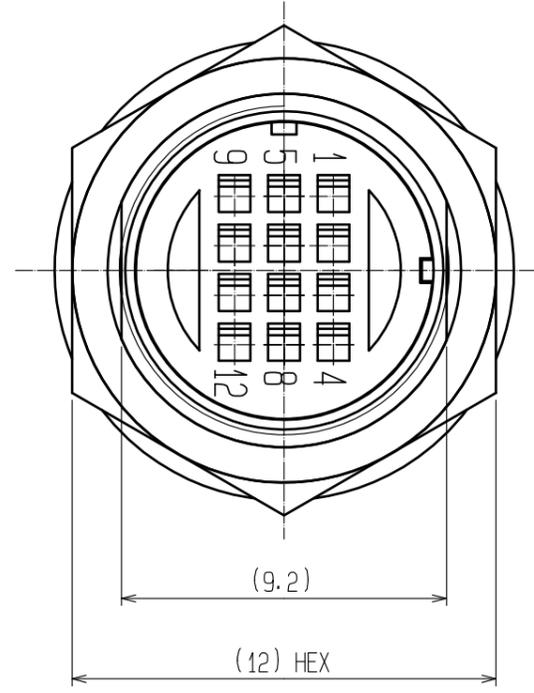
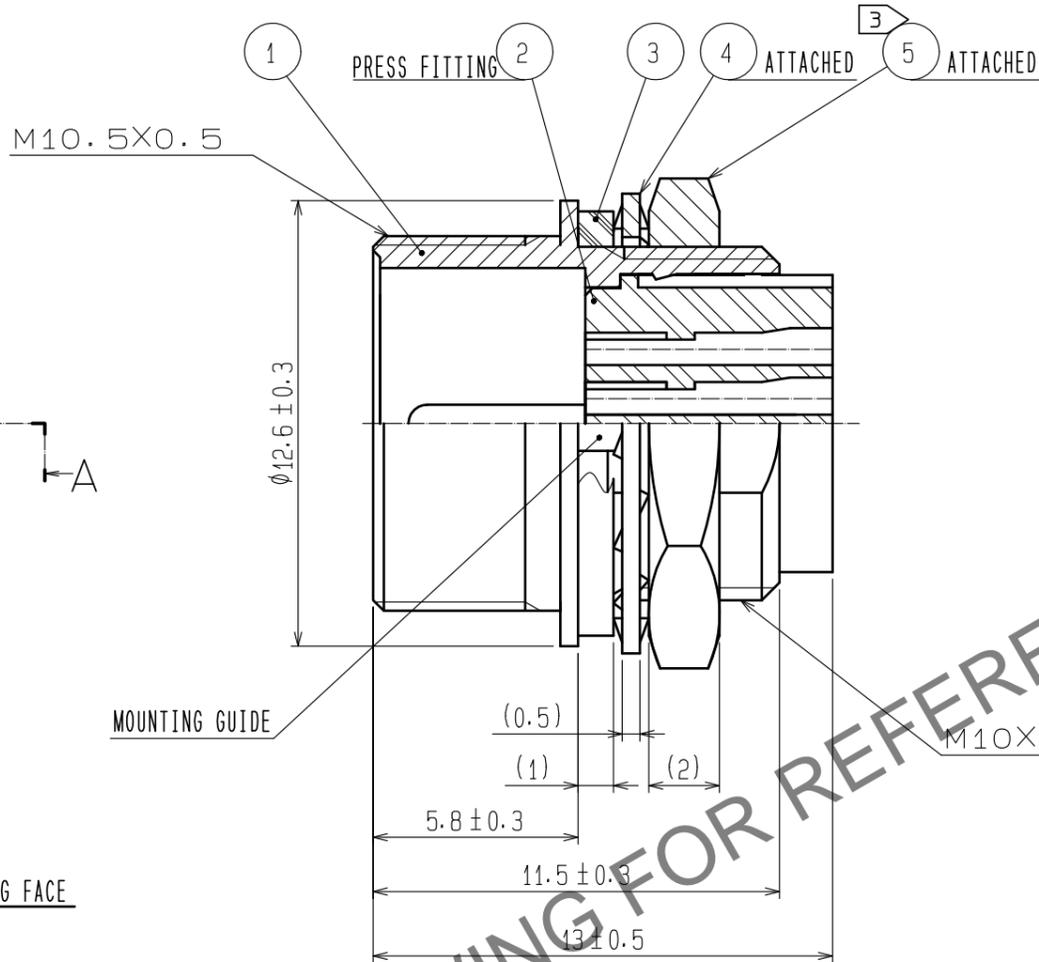


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

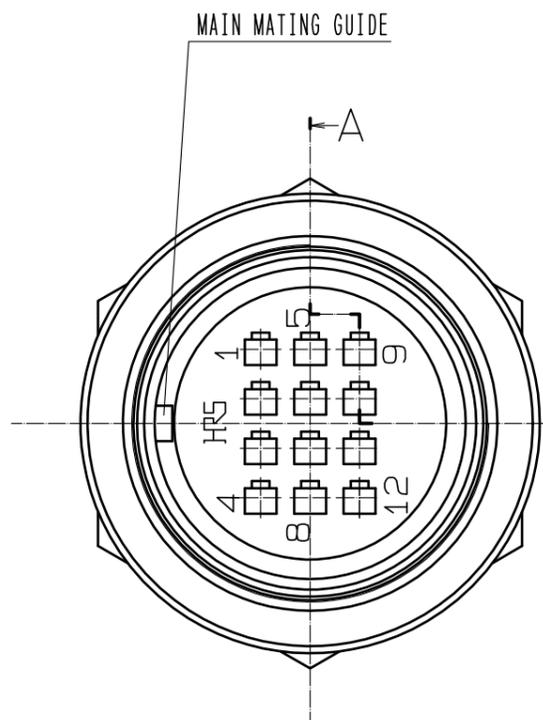

HRS DRAWING FOR REFERENCE

- NOTES 1 APPLICABLE CRIMP CONTACT : HR25-PC-211(CCL125-0420-0)
 (APPLICABLE WIRE: AWG #30, WIRE JACKET DIAMETER: ϕ 0.71 MAX.)
 2 APPLICABLE CONTACT REMOVAL TOOL (EXTRACTION TOOL: HR25-TPCCL150-0091-0)
 3 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑤ TO BE 1.5N · m.
 COATING WITH LOCTITE 243 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.

3	ETHYLENE PROPYLENE RUBBER	(BLACK)	5	BRASS	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	4	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		5 : 1		DESIGNED	CHECKED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	15.10.05	DRAWING NO. EDC-110241-71-00	
		CHECKED : EJ. KUNII	15.10.05	PART NO. HR25-9TR-12PC(71)	
		DESIGNED : WR. AJIRO	15.10.05	CODE NO. CL125-0408-5-71	
		DRAWN : WR. AJIRO	15.10.05	①/1	