


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

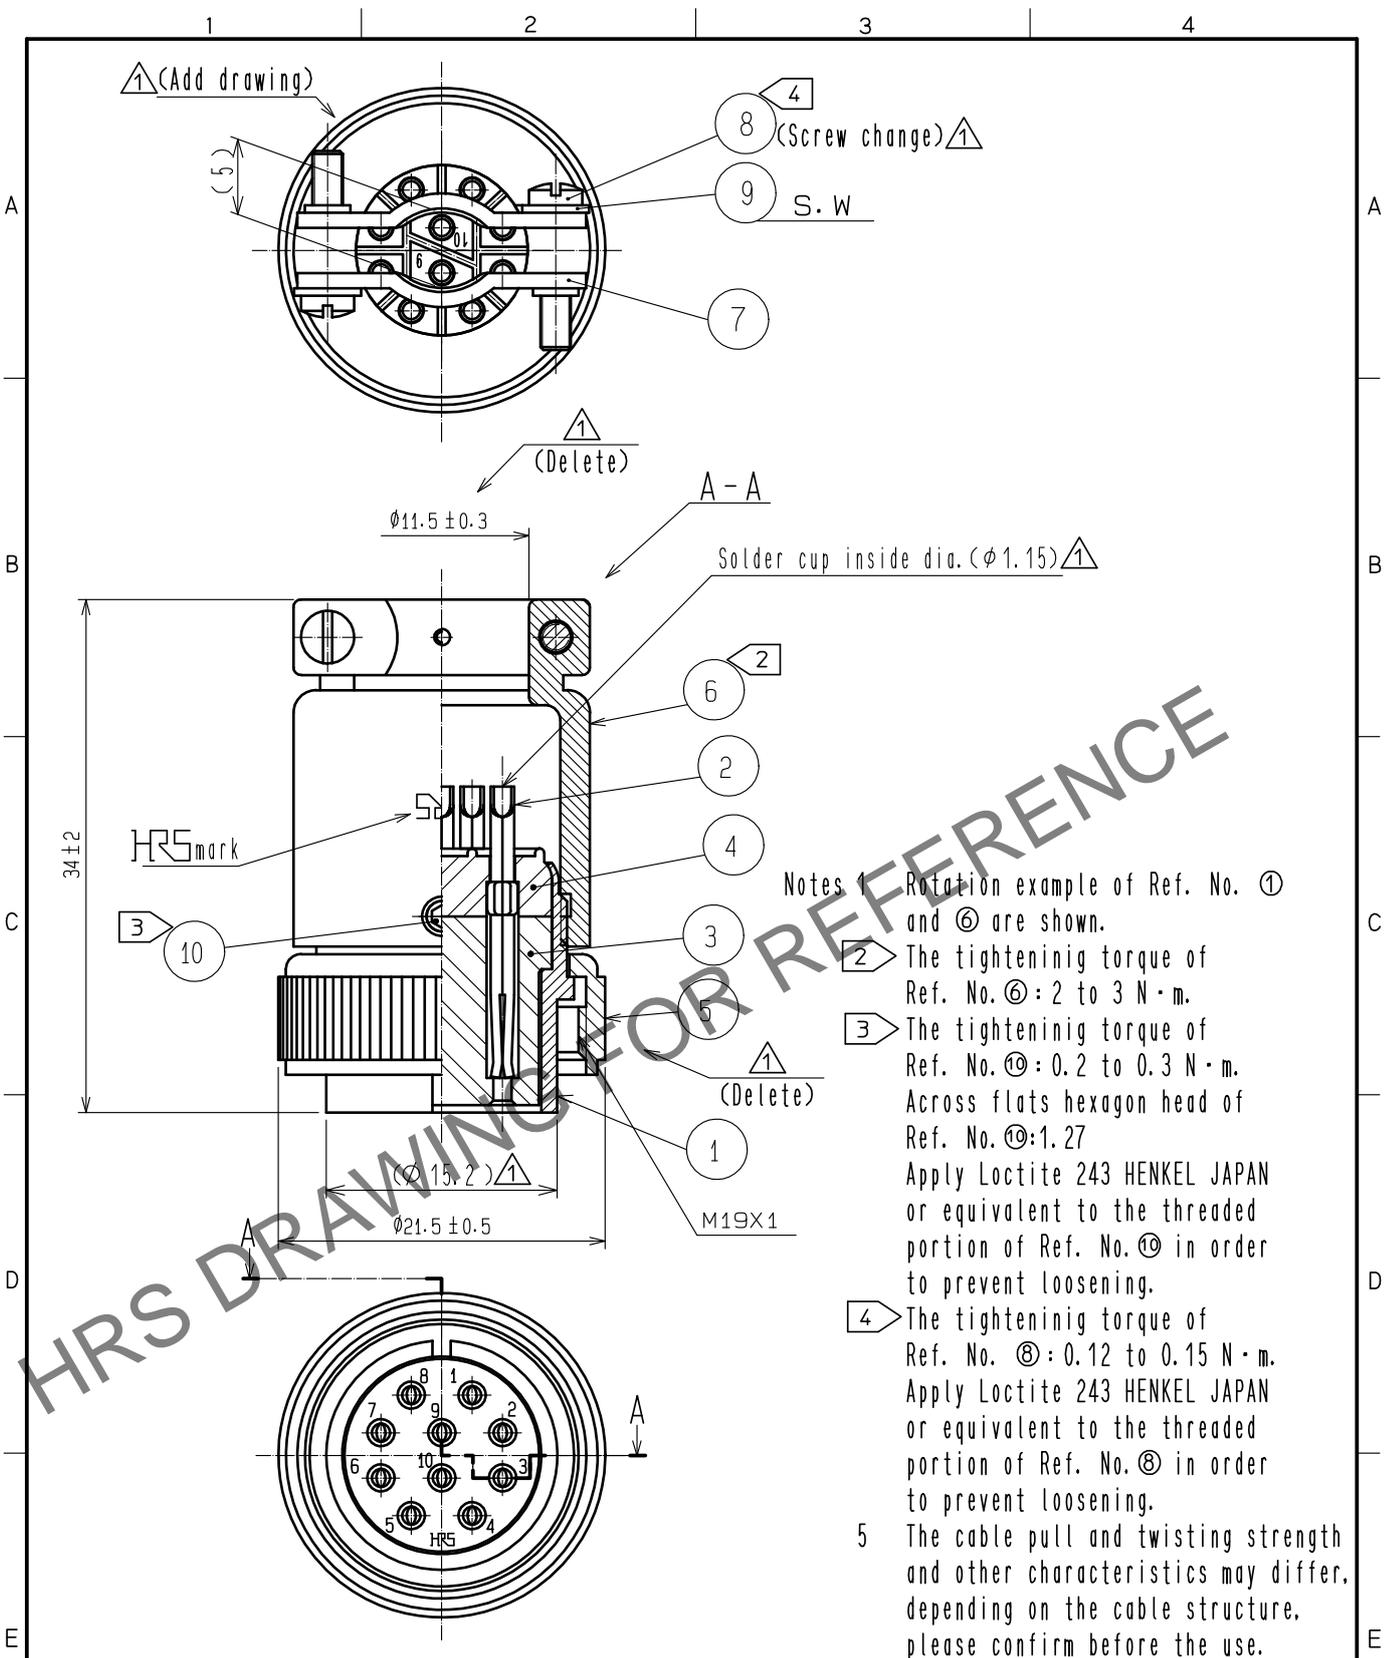

- Notes
- ① Rotation example of Ref. No. ① and ⑥ are shown.
  - ② The tightening torque of Ref. No. ⑥: 2 to 3 N·m.
  - ③ The tightening torque of Ref. No. ⑩: 0.2 to 0.3 N·m. Across flats hexagon head of Ref. No. ⑩: 1.27  
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑩ in order to prevent loosening.
  - ④ The tightening torque of Ref. No. ⑧: 0.12 to 0.15 N·m. Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑧ in order to prevent loosening.
  - ⑤ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure, please confirm before the use.

5	Brass	Nickel plating	10	Steel	Nickel plating	Hexagon socket set screws M2.6×0.45×2	
4	Polyphenylene sulfide	(Black)	9	Phosphor bronze	Nickel plating	JIS B 1251	
3	Polyphenylene sulfide	(Black)	8	Brass	Nickel plating	Slotted head screw M2×0.4×10	
2	Copper alloy	Silver plating 5μm min.	7	Brass	Nickel plating		
1	Brass	Nickel plating	6	Brass	Nickel plating		
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS

UNITS mm		SCALE 2 : 1	COUNT 7	DESCRIPTION OF REVISIONS DIS-C-00015648	DESIGNED HT. ZENBA	CHECKED HY. KOBAYASHI	DATE 20230626
APPROVED : HY. KOBAYASHI 20221227				DRAWING NO. EDC-003127-81-00			
CHECKED : HY. KOBAYASHI 20221227				PART NO. RM15TP-10S(81)			
DESIGNED : HT. ZENBA 20221227				CODE NO. CL0109-0055-8-81			
DRAWN : KR. SUZUKI 20221227							